


STREET 35


SURFACE / WALL

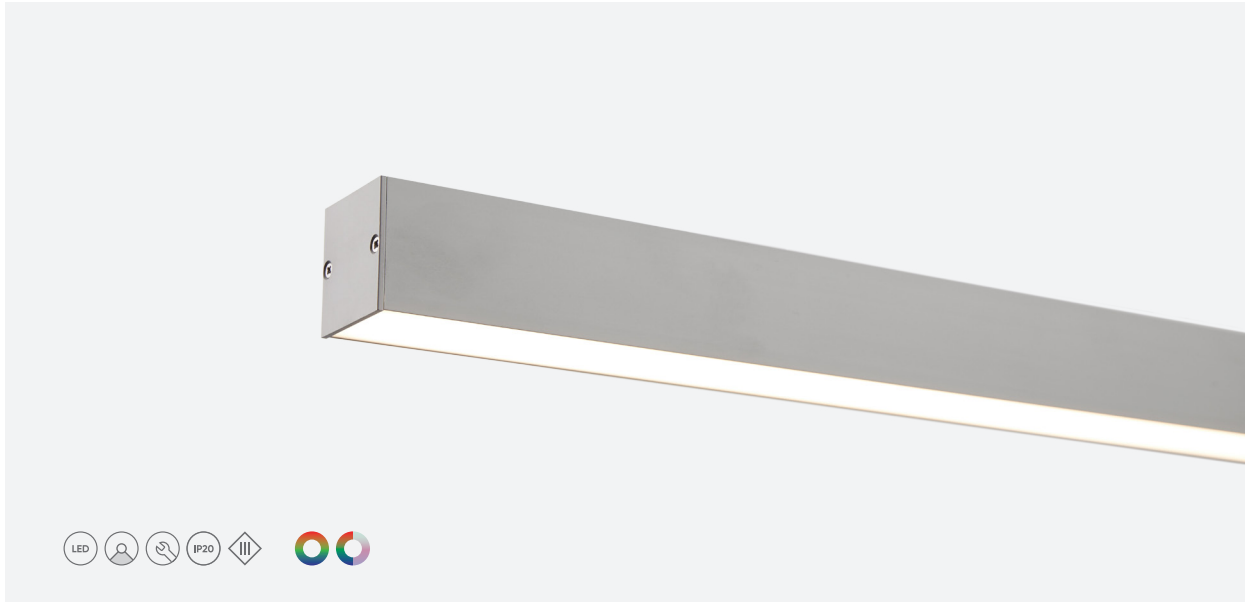

Street 35 Surface/Wall is a sleek, modern style LED profile ideal for grazing, general or accent lighting applications. The range includes a wide selection of diffuser options, finishes and colour temperatures - and fully customises to suit your application. Street 35 is supplied complete with end caps and mounting brackets and is also available in a pendant and recessed version.

PRODUCT SPECS

Profile Dimension (WxH)	34.8x37.5 mm
Finish	Aluminium, White, Black, Custom
Diffuser	Opal, Frost, Black
Mounting	Surface, Wall (clips included)
Power	10-40W (per metre)
Lumen Output	126-2075 lm (per metre)
Efficacy	Up to 83 lm/W
LED Colour Temp	2700K, 3000K, 4000K, 6500K, RGB, RGBW
CRI	>90
LED Binning	3 SDCM, 5 SDCM (RGB/RGBW)
Lifetime L70B50	Up to 50,000hrs
Beam	Symmetric
Driver	Remote 24V DC
Dimming Controls	Non-dim, DALI, 1-10V, Phase dim, DMX
Max standard length	3,000mm
Connection Type	Open single end tail 300mm Open double end tail 300mm Male/Female connector 300mm
IP Rating	IP20
Made to Order	Australia

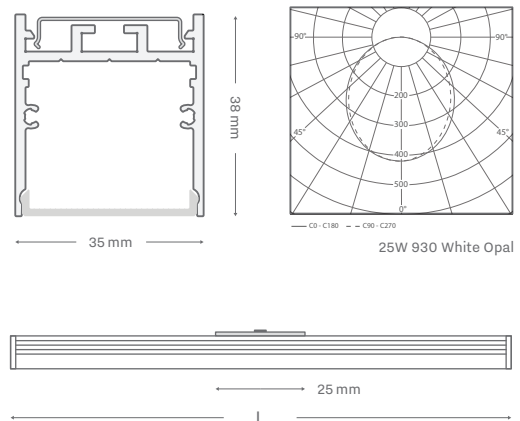

STREET 35


PENDANT



Street 35 Pendant is a suspended LED profile that subtly can enhance your space. The range includes a wide selection of diffuser options, finishes, colour temperatures – and fully customises to suit your application. Street 35 is supplied complete with end caps and suspension kit and is also available in a surface/wall or recessed version.

PRODUCT SPECS

Profile Dimension (WxH)	34.8x37.5 mm
Finish	Aluminium, White, Black, Custom
Diffuser	Opal, Frost, Black
Mounting	Pendant
Power	10-40W (per metre)
Lumen Output	126-2075 lm (per metre)
Efficacy	Up to 83 lm/W
LED Colour Temp	2700K, 3000K, 4000K, 6500K, RGB, RGBW
CRI	>90
LED Binning	3 SDCM, 5 SDCM (RGB/RGBW)
Lifetime L70B50	Up to 50,000hrs
Beam	Symmetric
Driver	Remote 24V DC
Dimming Controls	Non-dim, DALI, 1-10V Phase dim, DMX
Max standard length	3,000mm
Connection Type	Suspension - 1,200 or 3,000mm
IP Rating	IP20
Made to Order	Australia

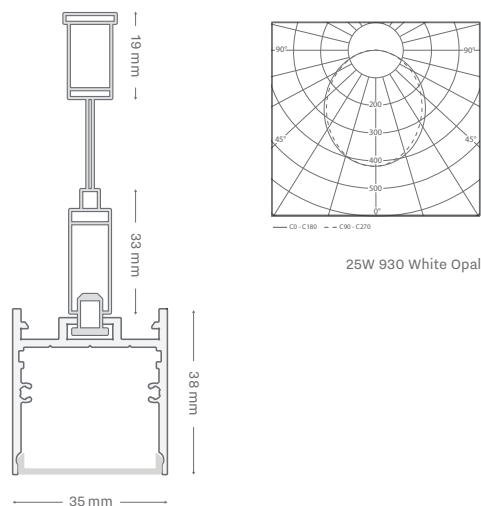

STREET 35

RECESSED



Street 35 is a slim recessed LED profile ideal for grazing or general lighting applications. The range includes a wide selection of diffuser options, finishes, colour temperatures – and fully customises to suit your application. Street 35 is supplied complete with end caps and spring clips and is also available in a surface/wall or pendant version.

PRODUCT SPECS

Profile Dimension (WxH)	49x37.5 mm
Cut out	35 mm
Finish	Aluminium, White, Black, Custom
Diffuser	Opal, Frost, Black
Mounting	Recessed
Power	10-40W (per metre)
Lumen Output	126-2075 lm (per metre)
Efficacy	Up to 83 lm/W
LED Colour Temp	2700K, 3000K, 4000K, 6500K, RGB, RGBW
CRI	>90
LED Binning	3 SDCM, 5 SDCM (RGB/RGBW)
Lifetime L70B50	Up to 50,000hrs
Beam	Symmetric
Driver	Remote 24V DC
Dimming Controls	Non-dim, DALI, 1-10V, Phase dim, DMX
Max standard length	3,000mm
Connection Type	Open single end tail 300mm Open double end tail 300mm Male/Female connector 300mm
IP Rating	IP20
Made to Order	Australia

